

# Composite Bridge Plugs



Our standard composite Bridge Plugs offer a reliable design compatible in 90% of wells. We are well-equipped to supply standard high-performance bridge plugs at a low cost.

## Low Cost/High Performance

- Innovative proven materials
- Standard low-cost reliable design
- Patented slip technology - patent number 9,157,288
- Customization available on bottom sub
- Large inventory with quick shipping
- Immediate availability

## HC 5.5 Bridge Plug

- Rating from Above: 10k PSI at 250° F
- Rating from Below: 8k PSI at 250° F
- OD: 4.38"
- ID: No ID. Venting above Upper Slips.
- OAL: 20.5"
- Casing Size & Range: 5.5" 17#-23#
- Optional Pump Down Ring OD: 4.63"

## HC 5.0 Bridge Plug

- Rating from Above: 10k PSI at 250° F
- Rating from Below: 8k PSI at 250° F
- OD: 3.90"
- ID: No ID. Venting above upper slips
- OAL: ~19.1"
- Casing Size & Range 5.0" – 18#
- Optional Pump Down Ring OD: 4.13"

## HC 4.5 Bridge Plug


- Rating from Above: 10k PSI at 250° F
- Rating from Below: 8k PSI at 250° F
- OD: 3.66"
- ID: No ID. Venting above Upper Slips.
- OAL: ~18.5"
- Casing Size & Range 4.5" – 11.6#, 13.5#
- Optional Pump Down Ring OD: 3.90"

In addition, pump down rings for all tools can be purchased separately.

## Take advantage of our 50+ years of experience

- Design engineering, quality and qualification testing managed by GP&C engineering
- Quick ship and stocking programs available
- Robust inventory management system

Learn how standard Bridge Plugs can help you win.

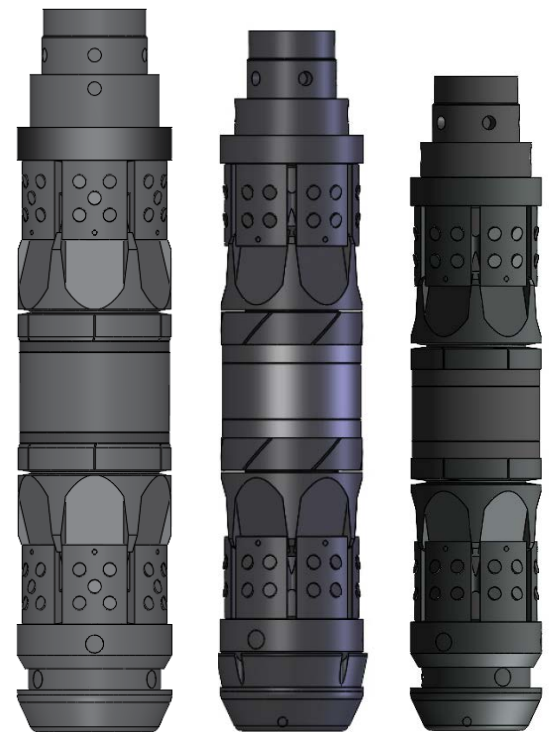

HC 5.5

HC 5.0

HC 4.5

Contact us:

[sales@genplastics.com](mailto:sales@genplastics.com)

[genplastics.com](http://genplastics.com)

6910 E. Orem Dr.  
Houston, TX 77075  
(713) 644-1449